



Rhea 2VOC EN 81-20/50 AUTOMATIC LANDING DOOR



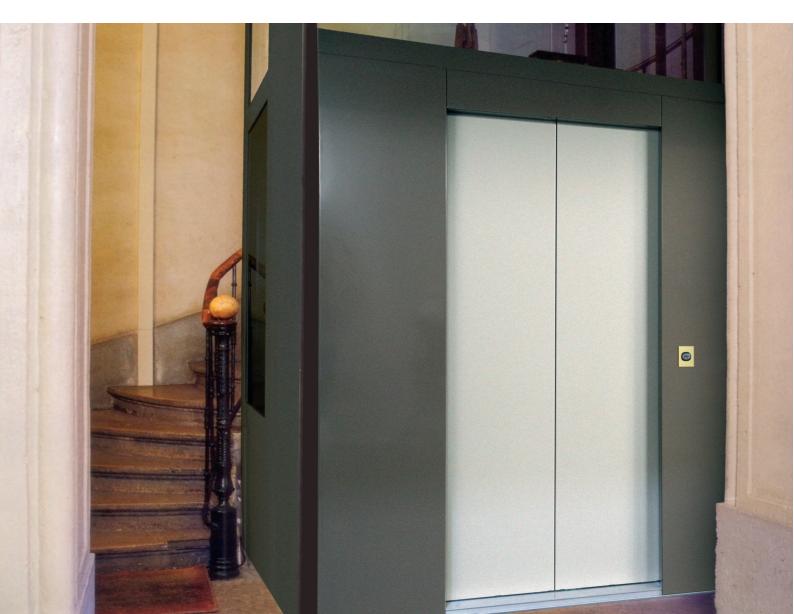

Rhea 2V OC

Our past work on renovation projets has led us to create the RHEA range. It's custom dimensions allow you to improve accessibility, optimise maintenance and servicing operations, and comply with current regulations. Upgrading becomes easier.

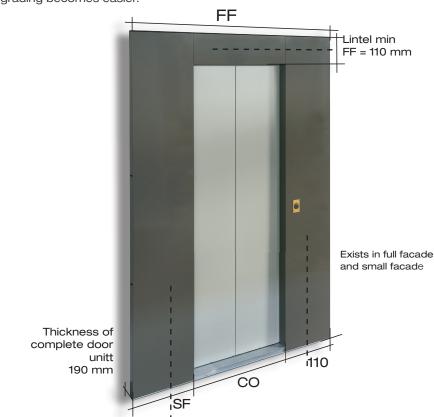

The door in your pleasure



New manufacturing process

- **Reduced installation time** is guaranted as the door is assembled with a single type of screw
- **Only one person** is needed to perform this operation



- No trace of spot welding on the panels
- The direction of the brush effect on lintel is the same as that of the uprights

Dimensions of the RHEA 2 panels side opening automatic landing door

	MIN	MAX
Clear opening (CO)	600	1,100
Clear height (CH)	1,900	2,200
Standard lintel height 200 mm	FF = 145 SF = 70	300
Full facade (FF)	Width, upright CO / 2+50	
Small facade (SF)	Width, standard uprights = 110 mm Overhanging in shaft = 66 mm	

Fire resistance certified E 120 as per EN 81-58 Ideal for Modernisation Ideal for the Residential market



- E 120 fire resistance certified as per standard EN 81-58
- In compliance with resistance tests as per standard EN 81-20/50
- Standard 200 mm lintel
- Custom uprights and lintel
- Compatible with existing car door or associated with the SLYCMA

Jet - s door



Linen stainless steel*

Accessory finishes



RAL colour*

Square 5WL stainless stainless steel* steel*

*Optional



SLYCMA Head Office Parc d'activité du Dôme 4 route du Dôme 69630 Chaponost FRANCE Tél. : +33 (0)4 78 86 81 00 Fax : +33 (0)4 78 86 81 00

SLYCMA Paris 34 route de Longjumeau Bâtiment 21 91380 Chilly-Mazarin FRANCE Tél. : +33 (0)1 69 79 32 10 Fax : +33 (0)1 69 79 32 15

www.slycma.com

Pictures for illustration purposes only